



CB797

L-5/L-5S

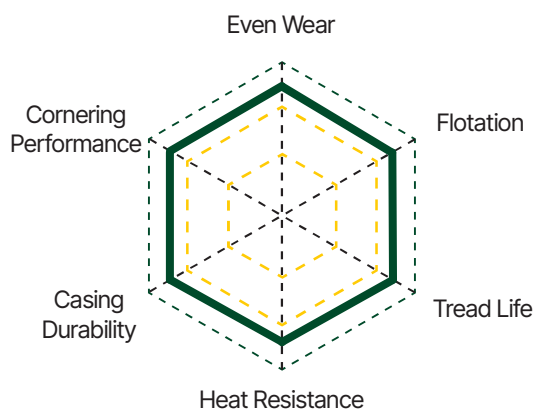

Enhanced traction in mud and sand

Tough tread rubber compounds help resist chipping and chunking

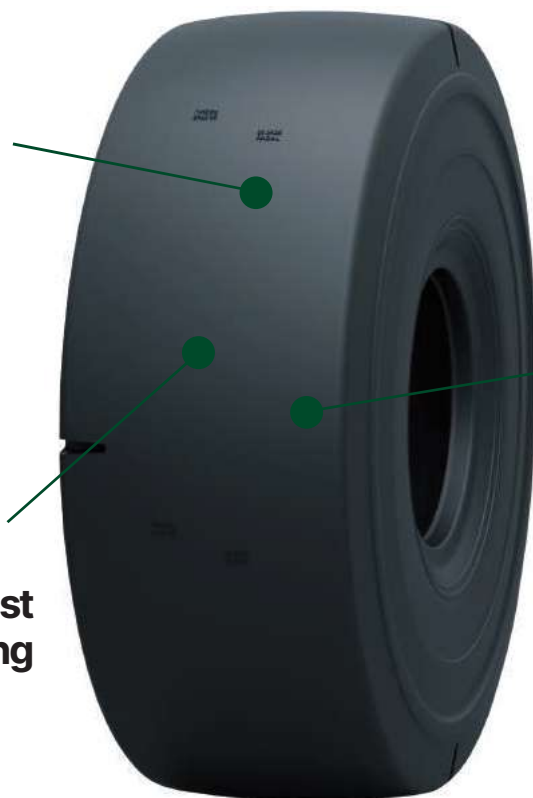

Rugged tread blocks and tread design offer outstanding off-road traction

Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD		SW		OTD		Inflated Pressure		Type
					mm	inch	mm	inch	mm	32ND	kPa	PSI	
10.00 R20	★★	/	166A2	7.50	1052	41	275	11	36.5	46	950	138	TT / TL
12.00 R20	/	/	175A2	8.50	1122	44	313	12	48	60	950	138	TT / TL
18.00 R25	★★★★	L-5S	206A2	13.00/2.5	1673	66	498	20	82	103	900	131	TL
17.5 R25	★★	L-5S	182A2	14.00/1.5	1400	55	445	18	66	83	650	94	TL
26.5 R25	★★	L-5S	209A2	22.00/3.0	1800	71	675	27	86	108	650	94	TL
29.5 R29	★★	L-5	218A2	25.00/3.5	2025	80	750	30	100	126	650	94	TL
	★	L-5	211A2								500	73	