


CM770

E-2 



Unique irregular wear pattern guarantees greater operator comfort, and lower rolling resistance performance

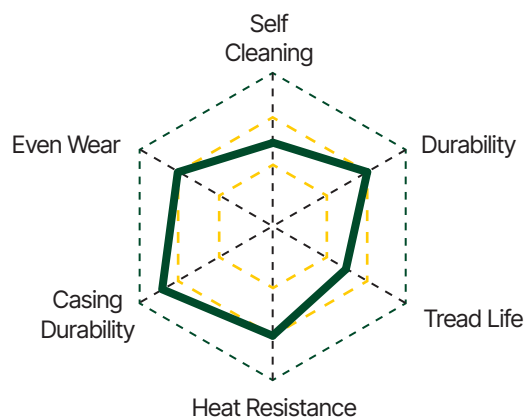

Special crane compound help offer shorter braking distance and longer tyre life

DOT/ECE Certificated

Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD		SW		OTD		Inflated Pressure		Type
					mm	inch	mm	inch	mm	32ND	kPa	PSI	
395/85R20	L 20PR	E-2	170F	10.00	1180	46	386	15	17.5	22	900	130	TL
385/95R24	★★★	E-2	170F/170E	10.00 / 1.5	1369	54	379	15	24	30	900	131	TT
385/95R25	★★★	E-2	170F/170E	10.00 / 1.5	1369	54	379	15	24	30	900	131	TL
445/95R25	★★★	E-2	174F/177E	11.25 / 2.0	1481	58	435	17	28	35	900	130	TL
505/95R25	★★★	E-2	186F	13.00 / 2.5	1595	63	496	20	26	33	900	130	TL

25"

Pattern	Application	Tire Load Limits at Various Cold Inflation Pressure									
		kPa	500	550	600	650	700	750	800	850	900
		psi	73	80	87	94	102	109	116	123	131
CM770	High Speed		-	-	-	-	-	-	-	-	-
CM399	100	kg	2590	2710	2840	2975	3110	3235	3360	3485	3600
		lbs	5710	5970	6260	6560	6860	7130	7410	7680	7940
	90	kg	3020	3165	3315	3470	3625	3775	3920	4065	4200
		lbs	6660	6980	7310	7650	7990	8320	8640	8960	9260
	80	kg	3545	3710	3885	4065	4250	4425	4590	4760	4920
		lbs	7820	8180	8560	8960	9370	9760	10120	10490	10850
	70	kg	4315	4520	4735	4960	5180	5395	5600	5805	6000
		lbs	9510	9960	10440	10930	11420	11890	12350	12800	13200
	60	kg	4830	5060	5300	5560	5800	6040	6270	6500	6720
		lbs	10650	11160	11680	12260	12790	13320	13820	14330	14820
	50	kg	5100	5340	5590	5850	6110	6370	6610	6850	7080
		lbs	11240	11770	12320	12900	13470	14040	14570	15100	15610
	45	kg	5225	5470	5730	6000	6270	6530	6780	7020	7260
		lbs	11520	12060	12630	13230	13820	14400	14950	15480	16010
	40	kg	5350	5605	5870	6150	6420	6690	6940	7200	7440
		lbs	11790	12360	12940	13560	14150	14750	15300	15870	16400
	30	kg	5620	5885	6160	6450	6730	7010	7280	7550	7800
		lbs	12390	12970	13580	14220	14840	15450	16050	16640	17200
	10	kg	8165	8550	8950	9370	9790	10200	10580	10970	11340
		lbs	18000	18850	19730	20660	21580	22490	23325	24180	25000
	5	kg	9410	9855	10320	10810	11290	11760	12210	12650	13080
		lbs	20750	21730	22750	23830	24890	25930	26920	27890	28840
	2	kg	10625	11125	11650	12200	12740	13270	13780	14280	14760
		lbs	23420	24530	25680	26900	28090	29260	30380	31480	32540
	0	kg	13090	13705	14350	15030	15700	16350	16970	17590	18180
		lbs	28860	30210	31640	33140	34610	36050	37410	38780	40080

385/95R25