


# CM770

E-2 



Unique irregular wear pattern guarantees greater operator comfort, and lower rolling resistance performance

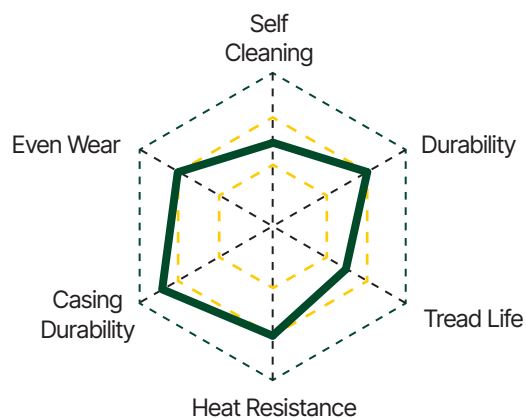

Special crane compound help offer shorter braking distance and longer tyre life

DOT/ECE Certificated

Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD		SW		OTD		Inflated Pressure		Type
					mm	inch	mm	inch	mm	32ND	kPa	PSI	
395/85R20	L 20PR	E-2	170F	10.00	1180	46	386	15	17.5	22	900	130	TL
385/95R24	★★★	E-2	170F/170E	10.00 / 1.5	1369	54	379	15	24	30	900	131	TT
385/95R25	★★★	E-2	170F/170E	10.00 / 1.5	1369	54	379	15	24	30	900	131	TL
445/95R25	★★★	E-2	174F/177E	11.25 / 2.0	1481	58	435	17	28	35	900	130	TL
505/95R25	★★★	E-2	186F	13.00 / 2.5	1595	63	496	20	26	33	900	130	TL

25"

Pattern	Application	Tire Load Limits at Various Cold Inflation Pressure									
		kPa psi	500 73	550 80	600 87	650 94	700 102	750 109	800 116	850 123	900 131
CM770	High Speed		-	-	-	-	-	-	-	-	-
CM399	100	kg	3725	4005	4305	4630	4840	5180	5380	5730	5920
		lbs	8210	8830	9490	10210	10670	11420	11860	12630	13050
	90	kg	3960	4260	4580	4930	5150	5515	5725	6100	6300
		lbs	8730	9390	10100	10870	11350	12160	12620	13450	13890
	80	kg	4220	4535	4875	5170	5480	5865	6090	6380	6700
		lbs	9300	10000	10750	11400	12080	12930	13430	14070	14800
	70	kg	4425	4760	5120	5505	5755	6160	6395	6795	7035
		lbs	9760	10490	11290	12140	12690	13580	14100	14980	15510
	60	kg	4545	4885	5250	5645	5900	6315	6555	6965	7210
		lbs	10020	10770	11570	12450	13010	13920	14450	15360	15900
	50	kg	4725	5080	5460	5875	6140	6570	6820	7250	7505
		lbs	10420	11200	12040	12950	13540	14480	15040	15980	16550
	45	kg	4785	5145	5530	5950	6220	6655	6910	7340	7600
		lbs	10550	11340	12190	13120	13710	14670	15230	16180	16760
	40	kg	4850	5215	5605	6030	6300	6750	7005	7440	7705
		lbs	10690	11500	12360	13290	13890	14880	15440	16400	16990
	30	kg	5275	5670	6095	6555	6850	7335	7615	8090	8375
		lbs	11630	12500	13440	14450	15100	16170	16790	17840	18460
	10	kg	7645	8220	8835	9500	9930	10635	11040	11735	12145
		lbs	16850	18120	19480	20940	21890	23450	24340	25870	26780
	5	kg	8790	9450	10160	10930	11420	12230	12695	13490	13965
		lbs	19380	20830	22400	24100	25180	26960	27990	29740	30790
	2	kg	9915	10660	11460	12325	12880	13795	14320	15215	15750
		lbs	21860	23500	25260	27170	28400	30410	31570	33540	34720
	0	kg	12195	13110	14100	15170	15840	16965	17610	18750	19370
		lbs	26890	28900	31090	33440	34920	37400	38820	41340	42700

445/95R25