


CM770

E-2 



Unique irregular wear pattern guarantees greater operator comfort, and lower rolling resistance performance

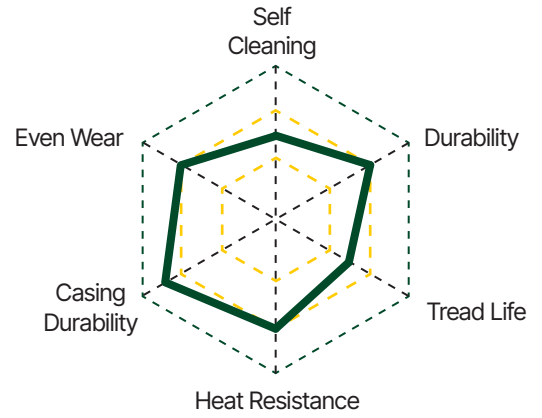

Special crane compound help offer shorter braking distance and longer tyre life

DOT/ECE Certificated

Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD		SW		OTD		Inflated Pressure		Type
					mm	inch	mm	inch	mm	32ND	kPa	PSI	
395/85R20	L 20PR	E-2	170F	10.00	1180	46	386	15	17.5	22	900	130	TL
385/95R24	★★★	E-2	170F/170E	10.00 / 1.5	1369	54	379	15	24	30	900	131	TT
385/95R25	★★★	E-2	170F/170E	10.00 / 1.5	1369	54	379	15	24	30	900	131	TL
445/95R25	★★★	E-2	174F/177E	11.25 / 2.0	1481	58	435	17	28	35	900	130	TL
505/95R25	★★★	E-2	186F	13.00 / 2.5	1595	63	496	20	26	33	900	130	TL

Pattern	Application	Tire Load Limits at Various Cold Inflation Pressure									
		kPa psi	500 73	550 80	600 87	650 94	700 102	750 109	800 116	850 123	900 131
CM770	High Speed	-	-	-	-	-	-	-	-	-	-
		kg	4325	4650	5000	5380	5625	6020	6255	6665	6885
	100	lbs	9530	10250	11020	11860	12400	13270	13790	14690	15180
		kg	4610	4955	5325	5725	5985	6405	6655	7090	7325
	90	lbs	10160	10920	11740	12620	13190	14120	14670	15630	16150
		kg	4895	5265	5660	6090	6365	6815	7080	7540	7790
	80	lbs	10790	11610	12480	13430	14030	15020	15610	16620	17170
		kg	5980	6430	6910	7430	7770	8315	8635	9195	9500
	70	lbs	13180	14180	15230	16380	17130	18330	19040	20270	20900
		kg	6685	7190	7730	8315	8695	9310	9670	10300	10640
	60	lbs	14740	15850	17040	18330	19170	20530	21320	22710	23460
		kg	7045	7575	8145	8760	9160	9805	10185	10850	11210
	50	lbs	15530	16700	17960	19310	20190	21620	22450	23920	24710
		kg	7225	7770	8355	8985	9395	10055	10445	11125	11495
	45	lbs	15930	17130	18420	19810	20710	22170	23030	24530	25340
		kg	7405	7960	8555	9205	9625	10300	10700	11400	11780
	40	lbs	16330	17550	18860	20290	21220	22710	23590	25130	25970
		kg	7765	8350	8975	9655	10095	10805	11225	11955	12350
	30	lbs	17120	18410	19790	21290	22260	23820	24750	26360	27230
		kg	11290	12140	13050	14035	14675	15705	16315	17375	17955
10	lbs	24890	26760	28770	30940	32350	34620	35970	38310	39580	
	kg	13025	14005	15055	16195	16930	18120	18820	20045	20710	
5	lbs	28720	30880	33190	35700	37320	39950	41490	44190	45660	
	kg	14700	15805	16990	18275	19105	20445	21235	22620	23370	
2	lbs	32410	34840	37460	40290	42120	45070	46820	49870	51520	
	kg	18105	19465	20925	22505	23525	25180	26155	27860	28785	
0	lbs	39910	42910	46130	49620	51860	55510	57660	61420	63460	

505/95R25