


# CB386

E-3/L-3

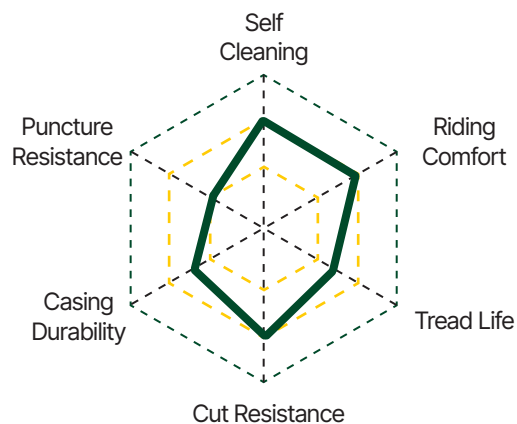

Light duty classical lug E3/L3 designed for multi-application

Special cut and chip resistance compound

Strong sidewalls are shaped to minimize the damage from cutting

Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD		SW		OTD		Inflated Pressure		Type
					mm	inch	mm	inch	mm	32ND	kPa	PSI	
17.5 R25	★★	E-3	167B	14.00 / 1.5	1350	53	445	18	27	34	525	76	TL
		L-3	182A2								650	94	
20.5 R25	★★	E-3	177B	17.00 / 2.0	1490	59	520	20	29	37	525	76	TL
		L-3	193A2								650	94	
23.5 R25	★★	E-3	185B	19.50 / 2.5	1615	64	595	23	34	43	525	76	TL
		L-3	201A2								650	94	
26.5 R25	★★	E-3	193B	22.00 / 3.0	1750	69	675	27	37	47	525	76	TL
		L-3	209A2								650	94	

### Szczegółowa tabela ciśnień dla opon 17.5R25 Westlake

	kPa	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650 (★★)
10km/h	<b>kg</b>	6410	6540	6675	6810	6950	7090	7235	7380	7530	7685	7840	8000	8165	8330	8500