


CB386

E-3/L-3



Light duty classical lug E3/L3 designed for multi-application

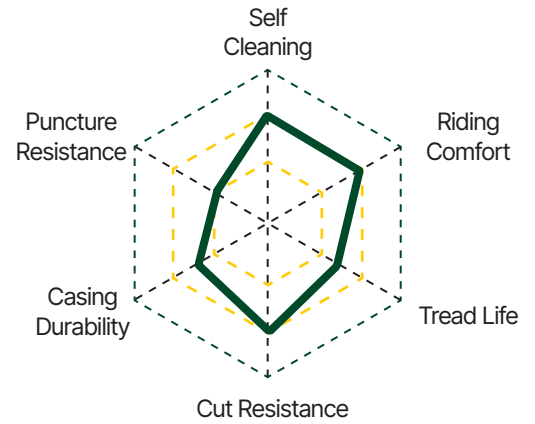

Special cut and chip resistance compound

Strong sidewalls are shaped to minimize the damage from cutting

Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD mm inch	SW mm inch	OTD mm 32ND	Inflated Pressure kPa PSI	Type
17.5 R25	★★	E-3	167B	14.00 / 1.5	1350 53	445 18	27 34	525 76	TL
		L-3	182A2					650 94	
20.5 R25	★★	E-3	177B	17.00 / 2.0	1490 59	520 20	29 37	525 76	TL
		L-3	193A2					650 94	
23.5 R25	★★	E-3	185B	19.50 / 2.5	1615 64	595 23	34 43	525 76	TL
		L-3	201A2					650 94	
26.5 R25	★★	E-3	193B	22.00 / 3.0	1750 69	675 27	37 47	525 76	TL
		L-3	209A2					650 94	

Szczegółowa tabela ciśnień dla opon 20.5R25 Westlake

	kPa	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650 (★★)
10km/h	kg	8685	8860	9040	9225	9410	9600	9795	9995	10195	10400	10610	10825	11045	11270	11500