


CB761

E-3 / L-3


Classical design with high resistance to impacts and cuts

Longer tread life due to the deeper tread depth

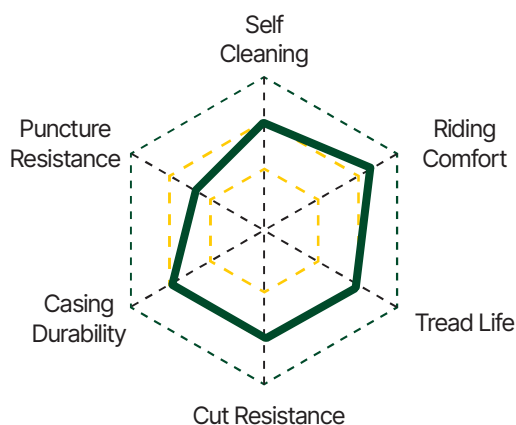

Optimised Retreading because of the robust casing

New sidewall design for enhanced reinforcement and protection

Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD		SW		OTD		Inflated Pressure		Type
					mm	inch	mm	inch	mm	32ND	kPa	PSI	
15.5 R25	★	L-3	169A2	12.00 / 1.3	1275	50	395	16	26	33	500	73	TL
20.5 R25	★★	E-3	177B	17.00 / 2.0	1490	59	520	20	33	42	525	76	TL
		L-3	193A2								650	94	
23.5 R25	★★	E-3	185B	19.50 / 2.5	1615	64	595	23	36	45	525	76	TL
		L-3	201A2								650	94	
26.5 R25	★★	E-3	193B	22.00 / 3.0	1750	69	675	27	37	47	525	76	TL
		L-3	209A2								650	94	
	★★★	IND-3	218A2	22.00 / 3.0	1750	69	675	27	37	47	700	102	TL
29.5 R25	★★	E-3	200B	25.00 / 3.5	1875	74	750	30	43	54	525	76	TL
		L-3	216A2								650	94	

Szczegółowa tabela ciśnień dla opon 29.5R25 Westlake

	kPa	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650 (★★)
10km/h	kg	16950	17290	17640	17995	18355	18725	19100	19485	19875	20275	20685	21100	21525	21960	22400