


CB763

E-4/L-4 

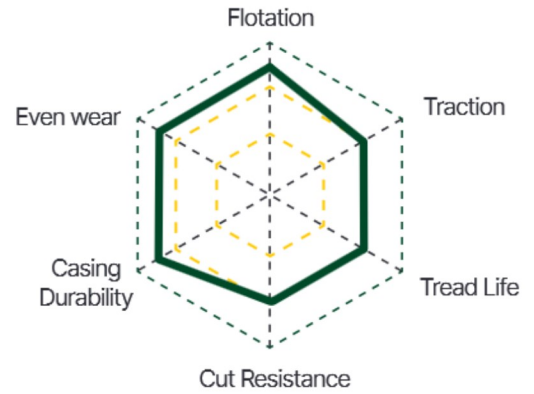

Latest design with alternating and multi-edged blocks offers better flotation and super traction on soft and muddy soil

Longer tread life due to the deeper E4/L4 tread depth and unique tread compound



Optimised Retread Ability because of the robust casing

Additional protective sidewalls are shaped to minimize damage from cutting

Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD		SW		OTD		Inflated Pressure		Type
					mm	inch	mm	inch	mm	32ND	kPa	PSI	
20.5 R25	★★	E-4	177B	17.00/20	1550	61	520	20	50	63	525	76	TL
		L-4	193A2								650	94	
23.5 R25	★★	E-4	185B	19.50/2.5	1675	66	595	23	53	67	525	76	TL
		L-4	201A2								650	94	
26.5 R25	★★	E-4	193B	22.00/3.0	1800	71	675	27	56	71	525	76	TL
		L-4	209A2								650	94	
29.5 R25	★★	E-4	200	25.00/3.5	1920	76	750	30	59	74	525	76	TL
		L-4	216A2								650	94	
750/65R25	★★	E-4	190B	24.00/3.0	1610	63	755	30	53	67	425	62	TL
		L-4	209A2								625	91	
875/65R29	★★	E-4	203B	28.00/3.5	1875	74	880	35	59	74	425	62	TL
		L-4	221A2								625	91	

Szczegółowa tabela ciśnień dla opon 29.5R25 Westlake

	kPa	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650 (★★)
10km/h	kg	16950	17290	17640	17995	18355	18725	19100	19485	19875	20275	20685	21100	21525	21960	22400