


CB771

L-4/E-4 

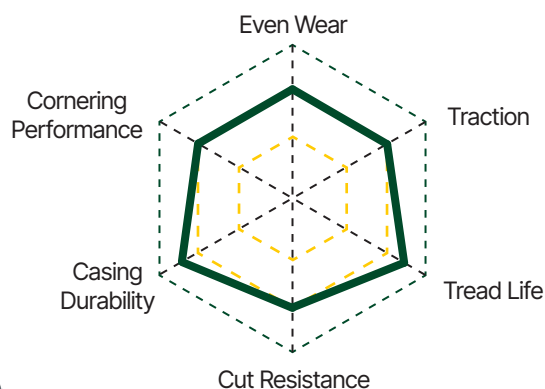

Aggressive lug design with large blocks at tread centre provides excellent traction and braking on rough road

Different compounds to optimize performance in all applications



Additional protective sidewalls are shaped to minimize damage from cutting

Optimised Retreading Ability because of the robust casing

Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD mm inch	SW mm inch	OTD mm 32ND	Inflated Pressure kPa PSI	Type
14.00 R20	★★★★	E-4	166B	10.00	1265 50	375 15	34 43	700 102	TL / TT
14.00 R24	★★★★	E-4	169B	10.00	1420 56	375 15	38 48	700 101	TT
14.00 R25	★★★★	E-4	169B	10.00	1420 56	375 15	38 48	700 101	TT / TL
16.00 R25	★★★★	E-4	180B/198A2	11.25/2.0	1550 61	430 17	44 55	800 116	TL / TT
18.00 R25	★★	E-4	185B	13.00/2.5	1673 66	498 20	54 68	700 102	TL
18.00 R33	★★	E-4	191B	13.00/2.5	1875 74	500 20	54 68	700 102	TL
	★★★★	E-4	195B					800 116	
21.00 R33	★★	E-4	200B	15.00 / 3.0	1955 77	570 22	54 68	700 102	TL
	★★★★	E-4	203B					800 116	
21.00 R35	★★	E-4	201B	15.00 / 3.0	2005 79	570 22	61 77	700 102	TL
	★★★★	E-4	204B					800 116	
24.00 R35	★★	E-4	209B	17.00 / 3.5	2175 86	655 26	64 81	700 102	TL
	★★★★	E-4	212B					800 116	