


CB773

L-5


Super deep tread pattern designed for wheel loader, dozer and grader requiring maximum traction

Optimised Re-treading Ability because of the robust casing

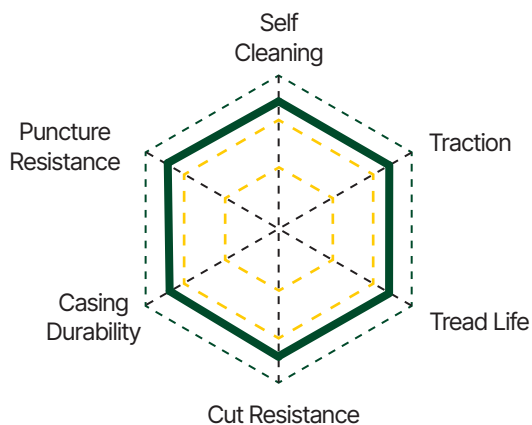

Perfect lug face ensures equal load distribution and even contact area

Additional protective sidewalls are shaped to minimize damage from cutting

Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD mm inch	SW mm inch	OTD mm 32ND	Inflated Pressure kPa PSI	Type
20.5 R25	★★	L-5	193A2	17.00 / 2.0	1550 61	520 20	70 88	650 94	TL
23.5 R25	★★	L-5	201A2	19.50 / 2.5	1675 66	595 23	76 96	650 94	TL
26.5 R25	★★	L-5	209A2	22.00 / 3.0	1800 71	675 27	86 108	650 94	TL
29.5 R25	★★	L-5	216A2	25.00 / 3.5	1920 76	750 30	94 118	650 94	TL

Szczegółowa tabela ciśnień dla opon 20.5R25 Westlake

	kPa	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650 (★★)
10km/h	kg	8685	8860	9040	9225	9410	9600	9795	9995	10195	10400	10610	10825	11045	11270	11500