


CB773

L-5

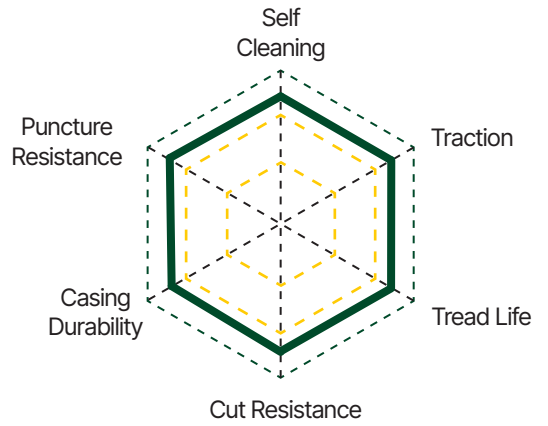

Super deep tread pattern designed for wheel loader, dozer and grader requiring maximum traction

Optimised Re-treading Ability because of the robust casing



Perfect lug face ensures equal load distribution and even contact area

Additional protective sidewalls are shaped to minimize damage from cutting

Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD		SW		OTD		Inflated Pressure		Type
					mm	inch	mm	inch	mm	32ND	kPa	PSI	
20.5 R25	★★	L-5	193A2	17.00 / 2.0	1550	61	520	20	70	88	650	94	TL
23.5 R25	★★	L-5	201A2	19.50 / 2.5	1675	66	595	23	76	96	650	94	TL
26.5 R25	★★	L-5	209A2	22.00 / 3.0	1800	71	675	27	86	108	650	94	TL
29.5 R25	★★	L-5	216A2	25.00 / 3.5	1920	76	750	30	94	118	650	94	TL

Szczegółowa tabela ciśnień dla opon 29.5R25 Westlake

	kPa	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650 (★★)
10km/h	kg	16950	17290	17640	17995	18355	18725	19100	19485	19875	20275	20685	21100	21525	21960	22400