


CB790

L-5

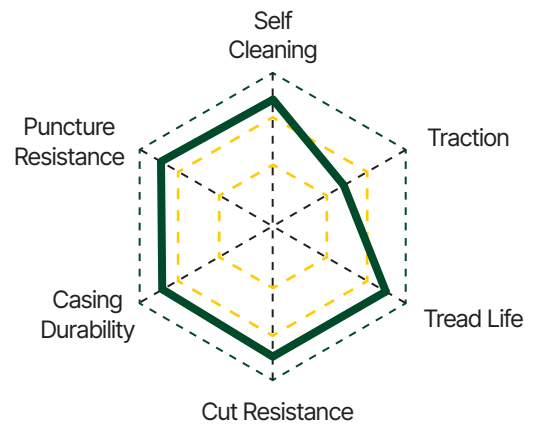

Super deep open tread pattern designed for wheel loader, dozer and grader requiring maximum traction

Optimised Retreading Ability because of the robust casing



Substantial crown and robust shoulders reinforced with a protection band make up a tyre

Additional protective sidewalls are shaped to minimize damage from cutting

Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD mm inch	SW mm inch	OTD mm 32ND	Inflated Pressure kPa PSI	Type
15.5 R25	★★	L-5	176A2	12.00 / 1.3	1325 52	395 16	60 76	650 94	TL
17.5 R25	★★	L-5	182A2	14.00 / 2.5	1400 55	445 18	68 86	650 94	TL
20.5 R25	★★	L-5	193A2	17.00 / 2.0	1550 61	520 20	70 88	650 94	TL
23.5 R25	★★	L-5	201A2	19.50 / 2.5	1675 66	595 23	76 96	650 94	TL
26.5 R25	★★	L-5	209A2	22.00 / 3.0	1800 71	675 27	86 108	650 94	TL
29.5 R25	★★	L-5	216A2	25.00 / 3.5	1920 76	750 30	94 118	650 94	TL
35/54R33	★★★	L-5	224A2	28.00 / 3.5	2075 82	890 35	97 122	650 94	TL
		L-5	229A2					800 116	

Szczegółowa tabela ciśnień dla opon 20.5R25 Westlake

	kPa	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650 (★★)
10km/h	kg	8685	8860	9040	9225	9410	9600	9795	9995	10195	10400	10610	10825	11045	11270	11500