


CB790

L-5

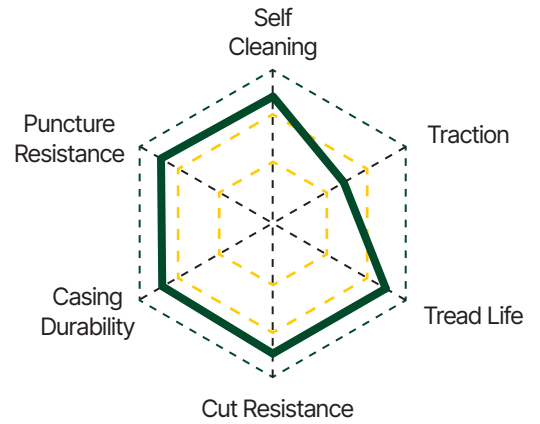

Super deep open tread pattern designed for wheel loader, dozer and grader requiring maximum traction

Optimised Retreading Ability because of the robust casing



Substantial crown and robust shoulders reinforced with a protection band make up a tyre

Additional protective sidewalls are shaped to minimize damage from cutting

Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD		SW		OTD		Inflated Pressure		Type
					mm	inch	mm	inch	mm	32ND	kPa	PSI	
15.5 R25	★★	L-5	176A2	12.00 / 1.3	1325	52	395	16	60	76	650	94	TL
17.5 R25	★★	L-5	182A2	14.00 / 2.5	1400	55	445	18	68	86	650	94	TL
20.5 R25	★★	L-5	193A2	17.00 / 2.0	1550	61	520	20	70	88	650	94	TL
23.5 R25	★★	L-5	201A2	19.50 / 2.5	1675	66	595	23	76	96	650	94	TL
26.5 R25	★★	L-5	209A2	22.00 / 3.0	1800	71	675	27	86	108	650	94	TL
29.5 R25	★★	L-5	216A2	25.00 / 3.5	1920	76	750	30	94	118	650	94	TL
35/54R33	★★★	L-5	224A2	28.00 / 3.5	2075	82	890	35	97	122	650	94	TL
		L-5	229A2								800	116	

Szczegółowa tabela ciśnień dla opon 23.5R25 Westlake

	kPa	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650 (★★)
10km/h	kg	10965	11185	11410	11640	11875	12115	12360	12610	12865	13125	13390	13660	13935	14215	14500