


CB792

E-3/L-3


Latest design with alternating and multi-edged blocks offers better flotation and excellent traction on soft and muddy soil

Longer tread life due to the deeper tread depth and unique tread compound

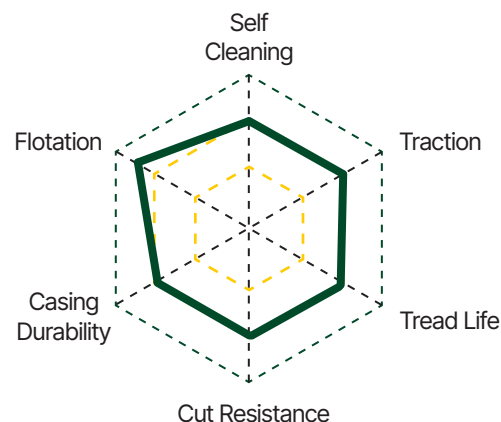

Optimised Retreading Ability because of the robust casing

Additional protective sidewalls are shaped to minimize damage from cutting

Tyre Size	Star Rating	TRA Code	Service Index	Standard Rim	OD mm inch	SW mm inch	OTD mm 32ND	Inflated Pressure kPa PSI	Type
23.5 R25	★★	E-3	185B	19.50 / 2.5	1615 64	595 23	38 48	525 76	TL
		E-3	201A2					650 94	
26.5 R25	★★	E-3	193B	22.00 / 3.0	1750 69	675 27	40 50	525 76	TL
		L-3	209A2					650 94	
29.5 R25	★★	E-3	200B	25.00 / 3.5	1875 74	750 30	44 55	525 76	TL
		L-3	216B					650 94	
550/65R25	★★	L-3	189A2	17.00 / 2.0	1350 53	545 21	33 42	625 94	TL
600/65R25	★★	E-3	178B 195A2	19.50 / 2.5	1415 56	605 24	35 44	425 62	TL
		L-3						625 91	
650/65R25	★★	E-3	180B 200A2	19.50 / 2.5	1480 58	640 25	42 53	425 62	TL
		L-3						625 91	

Szczegółowa tabela ciśnień dla opon 23.5R25 Westlake

	kPa	300	325	350	375	400	425	450	475	500	525	550	575	600	625	650 (★★)
10km/h	kg	10965	11185	11410	11640	11875	12115	12360	12610	12865	13125	13390	13660	13935	14215	14500