


CM770

E-2



Unique irregular wear pattern guarantees greater operator comfort, and lower rolling resistance performance

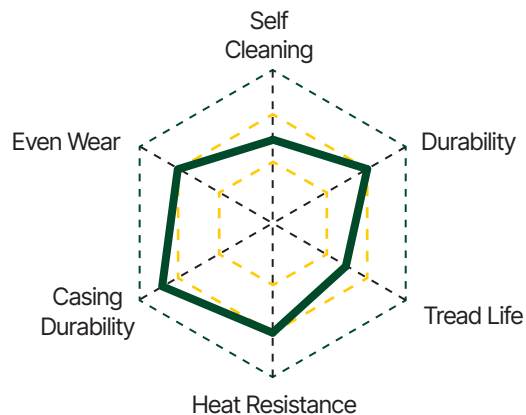

Special crane compound help offer shorter braking distance and longer tyre life

DOT/ECE Certificated

| Tyre Size | Star Rating | TRA Code | Service Index | Standard Rim | OD | | SW | | OTD | | Inflated Pressure | | Type |
|-----------|-------------|----------|---------------|--------------|------|------|-----|------|------|------|-------------------|-----|------|
| | | | | | mm | inch | mm | inch | mm | 32ND | kPa | PSI | |
| 395/85R20 | L 20PR | E-2 | 170F | 10.00 | 1180 | 46 | 386 | 15 | 17.5 | 22 | 900 | 130 | TL |
| 385/95R24 | ★★★ | E-2 | 170F/170E | 10.00 / 1.5 | 1369 | 54 | 379 | 15 | 24 | 30 | 900 | 131 | TT |
| 385/95R25 | ★★★ | E-2 | 170F/170E | 10.00 / 1.5 | 1369 | 54 | 379 | 15 | 24 | 30 | 900 | 131 | TL |
| 445/95R25 | ★★★ | E-2 | 174F/177E | 11.25 / 2.0 | 1481 | 58 | 435 | 17 | 28 | 35 | 900 | 130 | TL |
| 505/95R25 | ★★★ | E-2 | 186F | 13.00 / 2.5 | 1595 | 63 | 496 | 20 | 26 | 33 | 900 | 130 | TL |

| Pattern | Application | Tire Load Limits at Various Cold Inflation Pressure | | | | | | | | | |
|---------|-------------|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | | kPa | 500 | 550 | 600 | 650 | 700 | 750 | 800 | 850 | 900 |
| | | psi | 73 | 80 | 87 | 94 | 102 | 109 | 116 | 123 | 131 |
| CM770 | High Speed | - | - | - | - | - | - | - | - | - | - |
| | 100 | kg | 2590 | 2710 | 2840 | 2975 | 3110 | 3235 | 3360 | 3485 | 3600 |
| | | lbs | 5710 | 5970 | 6260 | 6560 | 6860 | 7130 | 7410 | 7680 | 7940 |
| | 90 | kg | 3020 | 3165 | 3315 | 3470 | 3625 | 3775 | 3920 | 4065 | 4200 |
| | | lbs | 6660 | 6980 | 7310 | 7650 | 7990 | 8320 | 8640 | 8960 | 9260 |
| | 80 | kg | 3545 | 3710 | 3885 | 4065 | 4250 | 4425 | 4590 | 4760 | 4920 |
| | | lbs | 7820 | 8180 | 8560 | 8960 | 9370 | 9760 | 10120 | 10490 | 10850 |
| | 70 | kg | 4315 | 4520 | 4735 | 4960 | 5180 | 5395 | 5600 | 5805 | 6000 |
| | | lbs | 9510 | 9960 | 10440 | 10930 | 11420 | 11890 | 12350 | 12800 | 13200 |
| | 60 | kg | 4830 | 5060 | 5300 | 5560 | 5800 | 6040 | 6270 | 6500 | 6720 |
| | | lbs | 10650 | 11160 | 11680 | 12260 | 12790 | 13320 | 13820 | 14330 | 14820 |
| | 50 | kg | 5100 | 5340 | 5590 | 5850 | 6110 | 6370 | 6610 | 6850 | 7080 |
| | | lbs | 11240 | 11770 | 12320 | 12900 | 13470 | 14040 | 14570 | 15100 | 15610 |
| | 45 | kg | 5225 | 5470 | 5730 | 6000 | 6270 | 6530 | 6780 | 7020 | 7260 |
| | | lbs | 11520 | 12060 | 12630 | 13230 | 13820 | 14400 | 14950 | 15480 | 16010 |
| | 40 | kg | 5350 | 5605 | 5870 | 6150 | 6420 | 6690 | 6940 | 7200 | 7440 |
| | | lbs | 11790 | 12360 | 12940 | 13560 | 14150 | 14750 | 15300 | 15870 | 16400 |
| | 30 | kg | 5620 | 5885 | 6160 | 6450 | 6730 | 7010 | 7280 | 7550 | 7800 |
| | | lbs | 12390 | 12970 | 13580 | 14220 | 14840 | 15450 | 16050 | 16640 | 17200 |
| | 10 | kg | 8165 | 8550 | 8950 | 9370 | 9790 | 10200 | 10580 | 10970 | 11340 |
| | | lbs | 18000 | 18850 | 19730 | 20660 | 21580 | 22490 | 23325 | 24180 | 25000 |
| | 5 | kg | 9410 | 9855 | 10320 | 10810 | 11290 | 11760 | 12210 | 12650 | 13080 |
| lbs | | 20750 | 21730 | 22750 | 23830 | 24890 | 25930 | 26920 | 27890 | 28840 | |
| 2 | kg | 10625 | 11125 | 11650 | 12200 | 12740 | 13270 | 13780 | 14280 | 14760 | |
| | lbs | 23420 | 24530 | 25680 | 26900 | 28090 | 29260 | 30380 | 31480 | 32540 | |
| 0 | kg | 13090 | 13705 | 14350 | 15030 | 15700 | 16350 | 16970 | 17590 | 18180 | |
| | lbs | 28860 | 30210 | 31640 | 33140 | 34610 | 36050 | 37410 | 38780 | 40080 | |

385/95R24